



# STRIP LIGHT

2026 CATALOGUE



**Introduction** 01

---

**COB LED Strips** 03

SF400-COB8N, SF528-COB8N, SF400-COB7N/3N,  
SF400-COB5N, SF320-COBA0, SF480-COBA0,  
SF512-COBA0, SF608-COB0D, SF4X0-COBRGB,  
SF576-COBRGB, SF896-COBRGBW, SF840-COBRGBWW

---

**SMD LED Strips** 09

SF100-2835M, SF140-2835M, SF160-2835M, SF120-2835A,  
SF120-2835N, SF120-2835CA, SF120-2835MA, SF180-2835MA,  
SF192-2835A, SF200-2835A12/A24, SF240-2835MA24,  
SF280-2835A24, SF420-2835A24, SF560-2835A24 ....

---

**NEON LED Strips** 19

SL-N0405F4003, SL-N0405F4004, SL-N0408E4005,  
SL-N0410F4005, SL-N0410E4005, SL-N1010E1006,  
SL-N1010F1006

## ***Who we are & What we do***

Founded in 2014, our company is built on the values of honesty, professionalism, and integrity. After years of development, we have established strong capabilities in design, engineering, and production, allowing us to provide a wide range of LED lighting products and accessories to customers worldwide. Our products are widely used in residential and commercial environments, and we focus on creating unique, high-quality LED lighting solutions with flexible customization options to meet different project needs, helping our partners strengthen and expand their market presence.

## ***A concept of lighting***

Lighting today is more than simple illumination. Our mission is not only to manufacture lighting products, but also to explore new possibilities in lighting design and application. By combining innovative technology with thoughtful design, we aim to create lighting solutions that integrate naturally into modern spaces while improving functionality, efficiency, and visual comfort.

## ***Quality and products***

Quality is at the core of everything we do. From concept design to final production, each product is carefully engineered to ensure reliability and performance. Our engineering capabilities cover sensor design, high-performance flexible LED strip design, aluminum extrusion and mold development, project solutions including drawings and installations, plastic and metal structure design, PCB development (aluminum PCB and double-sided FR4), as well as packaging design covering materials, structures, and labeling, allowing us to deliver both standard and customized lighting solutions with stable quality and efficient production.

# Our Factory



01.

# COB LED Strips



## SF400-COB8N

FREE CUT



Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SF400-COB8N12	Free to cut at any position	Width: 8mm copper: 2OZ	12V	10W	>90	2200K	600	60
						2700K	650	65
						3000K	700	70
						4000K	750	75
						6500K	800	80
SF400-COB8N24	Free to cut at any position	Width: 8mm copper: 2OZ	24V	10W	>90	2200K	400	60
						2700K	450	65
						3000K	500	70
						4000K	550	75
						6500K	600	80

## SF528-COB8N


FREE CUT



Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SF528-COB8N12	Free to cut at any position	Width: 8mm copper: 2OZ	12V	12W	>90	2200K	840	70
						2700K	900	75
						3000K	900	75
						4000K	960	80
						6500K	960	80
SF528-COB8N24	Free to cut at any position	Width: 8mm copper: 2OZ	24V	12W	>90	2200K	840	70
						2700K	900	75
						3000K	900	75
						4000K	960	80
						6500K	960	80

## SF400-COB7N


SLIM

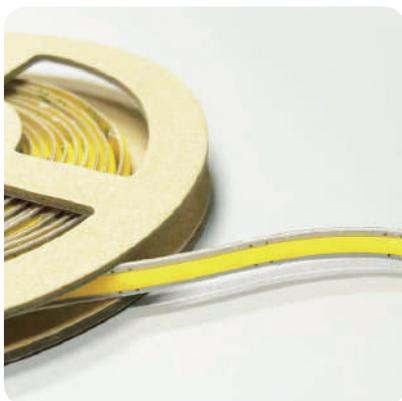

Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SF400-COB7N12	10mm	Width: 8mm copper: 2OZ	12V	7W	>90	2200K	490	70
						2700K	504	72
						3000K	546	78
						4000K	560	80
						6500K	560	80
SF400-COB7N24	20mm	Width: 8mm copper: 2OZ	24V	7W	>90	2200K	490	70
						2700K	504	72
						3000K	546	78
						4000K	560	80
						6500K	560	80

## SF400-COB3N


SLIM



Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SF400-COB3N12	10mm	Width: 8mm copper: 2OZ	12V	6W	>90	2200K	450	75
						2700K	468	78
						3000K	480	80
						4000K	510	85
						6500K	540	90
SF400-COB3N24	20mm	Width: 8mm copper: 2OZ	24V	6W	>90	2200K	450	75
						2700K	468	78
						3000K	480	80
						4000K	510	85
						6500K	540	90

## SF400-COB5N

SLIM



Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SF400-COB5N12	10mm	Width: 8mm copper: 2OZ	12V	7W	>90	2200K	525	75
						2700K	546	78
						3000K	560	80
						4000K	595	85
						6500K	630	90
SF400-COB5N24	20mm	Width: 8mm copper: 2OZ	24V	7W	>90	2200K	525	75
						2700K	546	78
						3000K	560	80
						4000K	595	85
						6500K	630	90

## SF320-COBA0

Monochrome



Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SF320-COBA012	25mm	Width: 8mm copper: 2OZ	12v	9w	>90	2200K	610	76
						2700K	650	81
						3000K	680	85
						4000K	760	95
						6500K	800	100
						11000K	820	102
SF320-COBA024	50mm	Width: 8mm copper: 2OZ	24v	9w	>90	2200K	610	76
						2700K	650	81
						3000K	680	85
						4000K	760	95
						6500K	800	100
						11000K	820	102

## SF480-COBA0


Monochrome



Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SF480-COBA012	25mm	Width: 8mm copper: 2OZ	12v	10w	>90	2200K	760	76
						2700K	800	80
						3000K	850	85
						4000K	950	95
						6500K	1000	100
						11000K	1000	100
SF480-COBA024	50mm	Width: 8mm copper: 2OZ	24v	10w	>90	2200K	760	76
						2700K	800	80
						3000K	850	85
						4000K	950	95
						6500K	1000	100
						11000K	1000	100

## SF512-COBA0


Monochrome

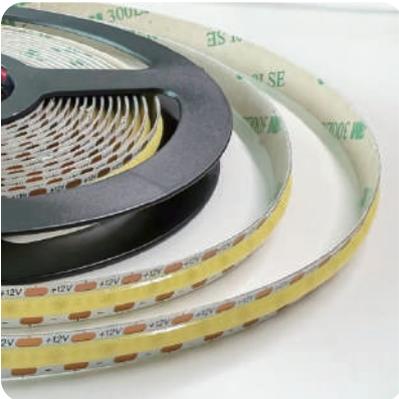

Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SF512-COBA012	7.8mm	Width: 8mm copper: 2OZ	12v	10w	>90	2200K	700	78
						2700K	765	85
						3000K	810	90
						4000K	855	95
						6500K	900	100
						11000K	900	100
SF512-COBA024	15.6mm	Width: 8mm copper: 2OZ	24v	10w	>90	2200K	700	78
						2700K	765	85
						3000K	810	90
						4000K	855	95
						6500K	900	100
						11000K	900	100

## SF608-COB0D



Dual-white



Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SF608-COB0D12	13.15mm	Width: 10mm copper: 2OZ	12v	11+11	>90	2700K	820	75
						6300K	1150	105
SF608-COB0D24	26.31mm	Width: 10mm copper: 2OZ	24v	11+11	>90	2700K	820	75
						6300K	1150	105

## SF4x0-COBRGB

RGB

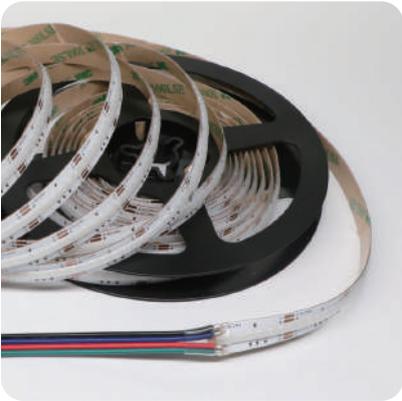

Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SF450-COBRGB12	20mm	Width: 10mm copper: 20Z	12v	15w	-	Red	-	-
						Green	-	-
						Blue	-	-
SF480-COBRGB24	50mm	Width: 10mm copper: 20Z	24v	15w	-	Red	-	-
						Green	-	-
						Blue	-	-

## SF576-COBRGB



RGB



Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SF576-COBRGB12	31.25mm	Width: 10mm copper: 20Z	12v	12w	-	Red	-	-
						Green	-	-
						Blue	-	-
SF576-COBRGB24	62.5mm	Width: 10mm copper: 20Z	24v	14w	-	Red	-	-
						Green	-	-
						Blue	-	-

## SF896-COBRGBW


RGBW

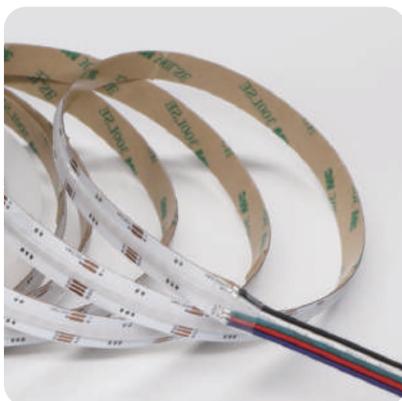

Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SF896-COBRGBW24	41.66mm	Width: 12mm copper: 20Z	24v	20w	>90	Red	-	-
						Green	-	-
						Blue	-	-
						White	360-500	70-100

# SF840-COBRGBWW

RGBWW



Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SF840-COBRGBWW24	31.25mm	Width: 12mm copper: 20Z	24v	21w	90	Red	-	-
						Green	-	-
						Blue	-	-
						3000K	460	92
						6000K	525	105




Undercabinet Lighting



Cove Lighting



Shelf Lighting

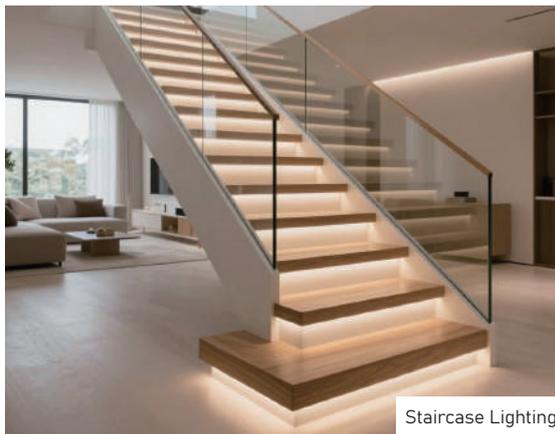

Staircase Lighting




02.

# SMD LED Strips

## SF100-2835M


MULTI-POWER



Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SF100-2835M12	10mm	Width: 8mm copper: 3OZ	12v	4.8	>90	3000K	550	115
						4000K	585	122
						6500K	575	120
				9.6	>90	3000K	1027	107
						4000K	1080	113
						6500K	1056	110
				14.4	>90	3000K	1450	100
						4000K	1512	105
						6500K	1470	102

## SF140-2835M


MULTI-POWER



Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SF140-2835M24	50mm	Width: 8mm copper: 3OZ	24v	4.8	>90	3000K	585	122
						4000K	624	130
						6500K	615	128
				9.6	>90	3000K	1125	117
						4000K	1200	125
						6500K	1150	120
				14.4	>90	3000K	1612	112
						4000K	1685	117
						6500K	1627	113

## SF160-2835M

MULTI-POWER



Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SF160-2835M24	50mm	Width: 10mm copper: 3OZ	24v	5	>90	3000K	700	139
						4000K	750	150
						6500K	735	147
				9	>90	3000K	1260	140
						4000K	1305	145
						6500K	1290	143
				13	>90	3000K	1690	130
						4000K	1755	135
						6500K	1730	133

## SF120-2835A

Monochrome



Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SF120-2835A12	25mm	Width: 8mm copper: 3OZ	12v	9.6w	>90	2200K	912	95
						2700K	960	100
						3000K	1010	105
						4000K	1075	112
						5700K	1050	110
						6500K	1050	110
SF120-2835A24	50mm	Width: 8mm copper: 3OZ	24v	9.6w	>90	2200K	912	93
						2700K	960	100
						3000K	1010	105
						4000K	1075	112
						5700K	1050	110
						6500K	1050	110

## SF120-2835N


Monochrome



Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SF120-2835N12	25mm	Width: 5mm copper: 3OZ	12v	9.6w	>90	2200K	912	95
						2700K	960	100
						3000K	1010	105
						4000K	1075	112
						5700K	1050	110
						6500K	1050	110
SF120-2835N24	50mm	Width: 5mm copper: 3OZ	24v	9.6w	>90	2200K	912	93
						2700K	960	100
						3000K	1010	105
						4000K	1075	112
						5700K	1050	110
						6500K	1050	110

## SF120-2835CA

Constant Current

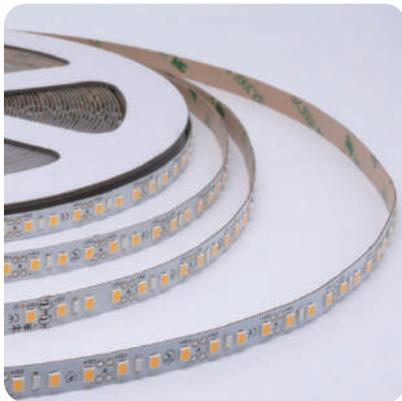


Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SF120-2835CA12	25mm	Width: 8mm copper: 3OZ	12v	6.5w	>90	3000K	625	96
						4000K	650	100
						6500K	650	100
SF120-2835CA24	50mm	Width: 8mm copper: 3OZ	24v	6.3w	>90	3000K	605	96
						4000K	630	100
						6500K	630	100



## SF180-2835A

Mini Cut




Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SF180-2835A24	11.1mm	Width: 8mm copper: 3OZ	24v	13.5W	>80	3000K	1485	110
						4000K	1525	115
						6500K	1525	115



## SF192-2835A

High-Density




Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SF192-2835A24	31.25mm	Width: 8mm copper: 3OZ	24v	15w	>90	3000K	1350	90
						4000K	1430	95
						6500K	1430	95



## SF200-2835A


High-Density & High efficiency



Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SF200-2835A12	20mm	Width: 8mm copper: 3OZ	12v	12w	>90	3000K	1530	128
						4000K	1600	135
						6500K	1600	135

## SF210-2835A24



Professional Grade



Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SF210-2835A24	33.33mm	Width: 8mm copper: 3OZ	24v	15w	>90	3000K	1650	110
						4000K	1720	115
						6500K	1720	115

## SF240-2835MA24


Monochrome

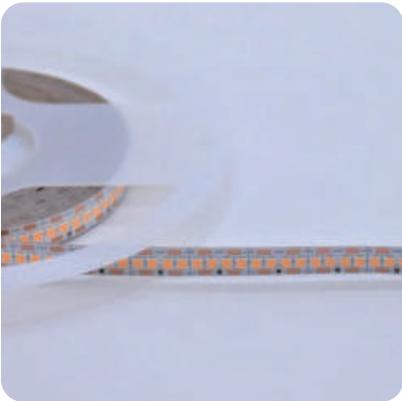

Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SF240-2835MA24	Free cut	Width: 10mm copper: 3OZ	24v	22W	>90	3000K	2860	130-143
						4000K	3146	
						6500K	3080	

## SF280-2835A24

Professional Grade

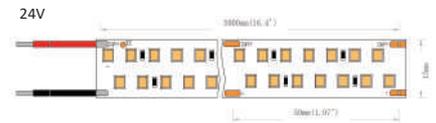


Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SF280-2835A24	50mm	Width: 15mm copper: 3OZ	24v	25w	>90	3000K	2750	110
						4000K	2850	115
						6500K	2850	115



## SF420-2835A24

Professional Grade

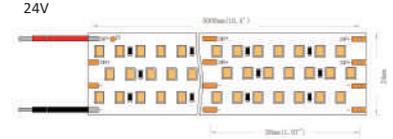


Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SF420-2835A24	50mm	Width: 24mm copper: 30Z	24v	35w	>90	3000K	3850	110
						4000K	4050	115
						6500K	4050	115



## SF560-2835A24

Professional Grade



Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SF560-2835A24	50mm	Width: 30mm copper: 30Z	24v	43w	>90	3000K	4750	110
						4000K	4950	115
						6500K	4950	115



## SF136-2835EC


End Control



Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SF136-2835EC12	14.7mm	Width: 8mm copper: 30Z	12v	12w	>90	3000K	1320	110
						4000K	1350	115
						6500K	1350	115
SF136-2835EC24	14.7mm	Width: 8mm copper: 30Z	24v	12w	>90	3000K	1320	110
						4000K	1350	115
						6500K	1350	115

## SF1x0-2835D

Polarity-reverse control | Dual White

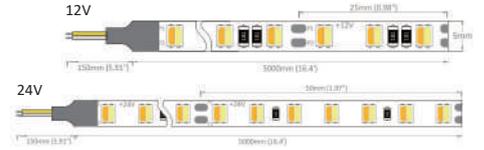

Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SF120-2835D212	25mm	Width: 5mm copper: 30Z	12v	9.6w	>90	2200K	845	88
						6500K	960	100
SF140-2835D224	50mm	Width: 5mm copper: 30Z	24v	9.6w	>90	2200K	1015	106
						6500K	1150	120

\* Control Method: Polarity switching to switch colors

## SF1x0-2835D3

Dual-white





Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SF120-2835D312	25mm	Width: 8mm copper: 30Z	12v	9.6+9.6	>90	2200K	845	88
						6500K	960	100
SF140-2835D324	50mm	Width: 8mm copper: 30Z	24v	9.6+9.6	>90	2200K	1015	106
						6500K	1150	120

\* Control Method: Common Anode, 3 wire control

## SF300-2835PG

GROW

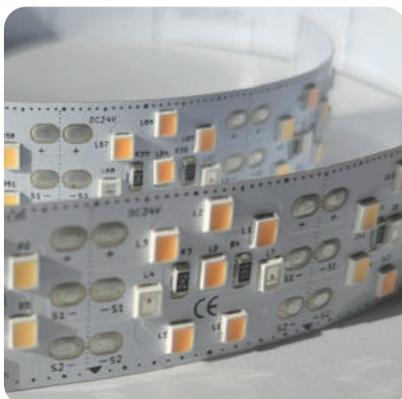


Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SF300-2835PG24	25mm	Width: 20mm copper: 30Z	24v	14.4+14.4W	>97	Multi-Color	2500lm	-

\* Control Method: Common Anode, 3 wire control

## SF120-2835RGB


RGB



Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SF120-2835RGB	50mm	Width: 5mm	24v	7.5w	>80	Red	-	-
						Green	-	-
						Blue	-	-
						White	517	110

## SF120-2835RGB+W


RGBW



Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SF120-2835RGB+W	100mm	Width: 10mm (optional in 8mm) Copper: 30Z	24V	MAX 19W	>80	RGB+W	W:517	110

## SF192-2835RGB+W

RGBW




Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SF192-2835RGB+W	62.5mm	Width: 8mm (optional in 8mm) Copper: 30Z	24V	-	>80	RGB+W	W:517	110



## SF120-2835RGB+WW

RGBWW




Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color	Lumen (lm)	Efficiency (lm/w)
SF120-2835RGB+WW	100mm	Width: 12mm Copper: 3OZ	24V	MAX 24W	>90	RGB+	WW:517	110
						WW	CW:540	115



## SF120-2835DW

DIGITAL




Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Lumen (lm)	Efficiency (lm/w)
SF120-2835DW	25mm	Width: 6mm Copper: 3OZ	12V	11.5W	>80	3000K-1288 4000K-1380 6500K-1357	112-120



## SF120-2835DWW


DIGITAL



Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Lumen (lm)	Efficiency (lm/w)
SF120-2835DWW	25mm	Width: 6mm Copper: 3OZ	12V	MAX 7.7W	>90	2200K-693 6500K-770	90-100

## SF120-2835DRGB


DRGB



Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color
SF120-2835DRGB	25mm	Width: 6mm Copper: 3OZ	12V	MAX 20W	>90	RGB

## SF100-4040DRGB

DRGB




Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color
SF120-4040DRGB	10mm	Width: 6mm Copper: 3OZ	12V	<10W		RGB




Closet Lighting



Outdoor Lighting

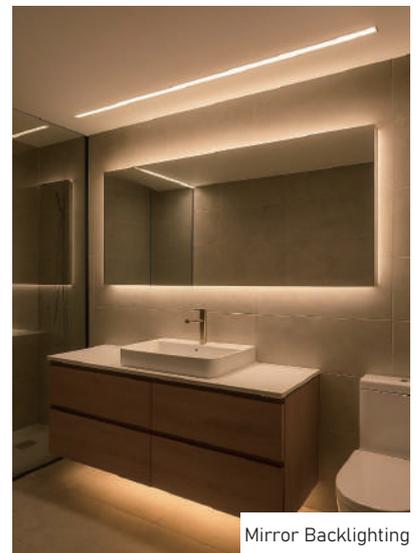

Mirror Backlighting

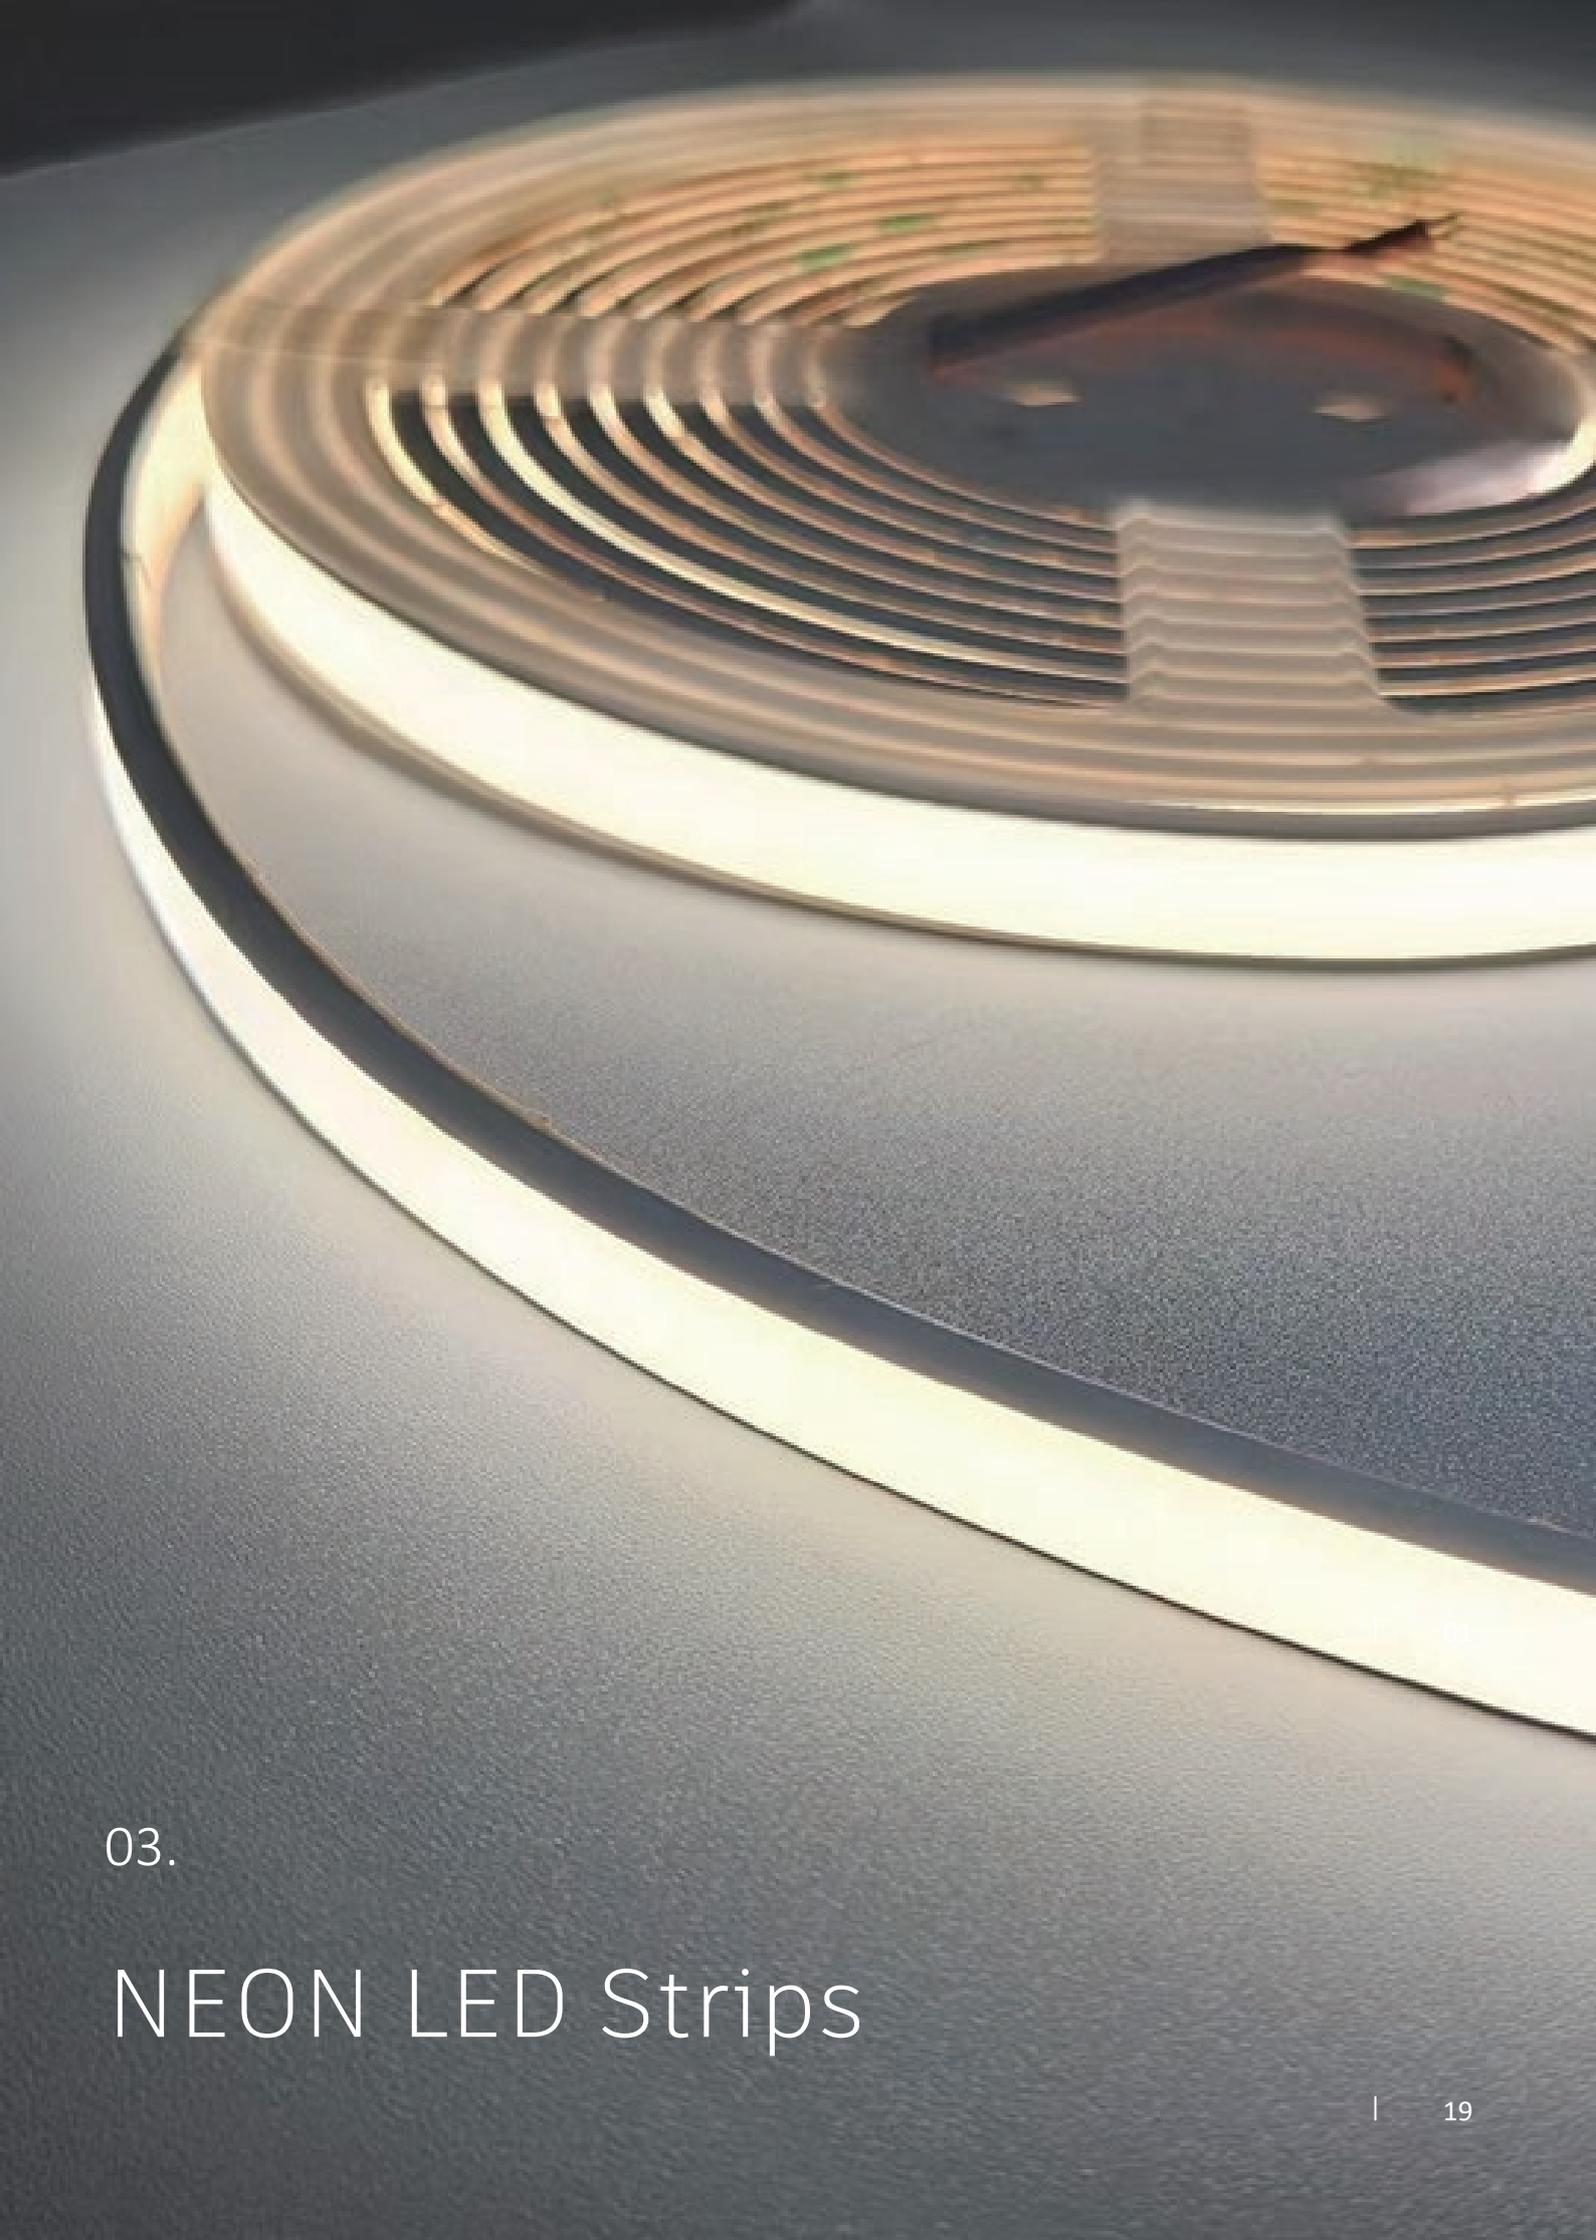

1 | 03

03.

# NEON LED Strips

## SL-N0405F4003

MONO



Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SL-N0405F4003-12	10mm	Width: 3mm copper: 3OZ	24V	6W	>90	2200/2500/ 2700/3000/ 4000/6500K	180	30
SL-N0405F4003-24	20mm	Width: 3mm copper: 3OZ	24V	6W	>90	2200/2500/ 2700/3000/ 4000/6500K	180	30

\* MINI size Neon light, Top Bending (Vertical Bending)

## SL-N0405F4004

MONO




Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SL-N0405F4004-12	10mm	Width: 3mm copper: 3OZ	12V	6W	>90	2200/2500/ 2700/3000/ 4000/6500K	210	35
SL-N0405F4004-24	20mm	Width: 3mm copper: 3OZ	24V	6W	>90	2200/2500/ 2700/3000/ 4000/6500K	210	35

\* MINI size Neon light, Top Bending (Vertical Bending)

## SL-N0408E4005

MONO





Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SL-N0408E4005-12	10mm	Width: 5mm copper: 3OZ	24V	8W	>90	2200/2500/ 2700/3000/ 4000/6500K	224	28
SL-N0408E4005-24	20mm	Width: 5mm copper: 3OZ	24V	8W	>90	2200/2500/ 2700/3000/ 4000/6500K	224	28


\* MINI size Neon light, Side Bending (Horizontal Bending)

## SL-N0410F4005

MONO

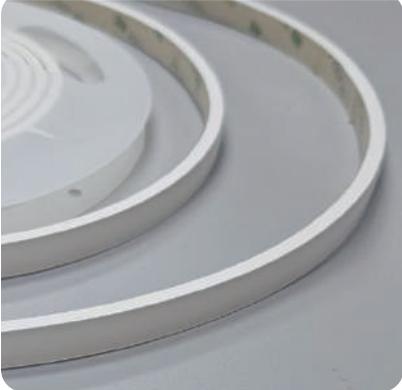


Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SL-N0410F4005-12	10mm	Width: 8mm copper: 2OZ	24V	8W	>90	2200/2500/ 2700/3000/ 4000/6500K	320	40
SL-N0410F4005-24	20mm	Width: 8mm copper: 2OZ	24V	8W	>90	2200/2500/ 2700/3000/ 4000/6500K	320	40



\* Top Bending (Vertical Bending)

## SL-N0410E4005

MONO



Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SL-N0410E4005-12	10mm	Width: 5mm copper: 2OZ	12V	8W	>90	2200/2500/ 2700/3000/ 4000/6500K	208	26
SL-N0410E4005-24	20mm	Width: 5mm copper: 2OZ	24V	8W	>90	2200/2500/ 2700/3000/ 4000/6500K	208	26

\* Side Bending (Horizontal Bending)

## SL-N1010E1006

MONO





Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SL-N1010E1006	10mm	Width: 6mm copper: 3OZ	12V	MAX 20W	--	Digital RGB	--	--

\* Digital RGB neon light, Top Bending (Vertical Bending)



# SL-N1010E1006

MONO



Model No.	Cut Length (mm)	PCB	Voltage (V)	Power (W/m)	CRI	Color (K)	Lumen (lm)	Efficiency (lm/w)
SL-N1010E1006	10mm	Width: 6mm copper: 30Z	12V	MAX 20W	--	Digital RGB	--	--

\* Digital RGB neon light, Side Bending (Horizontal Bending)

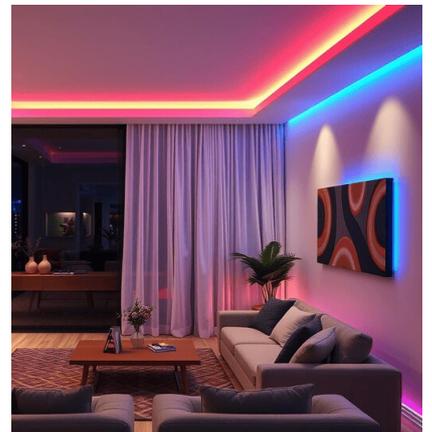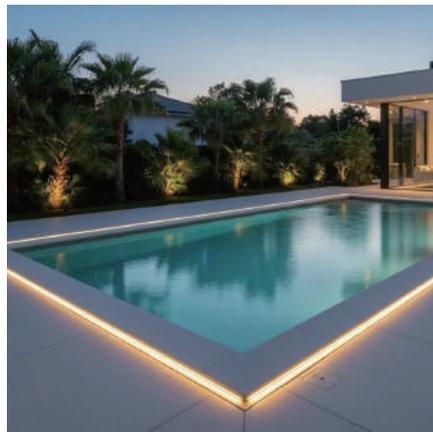



**TEL Number**

+86 18503050862



**Mail**

info@semi-light.com



**Website**

<http://semi-light.com/>



**Address**

B1, Guangyi Industrial Park,  
528303, Shunde District,  
Foshan, China